



**Farmer  
Traktor**

**FT**  
**7258**  
**7258R**

# FT 7258 7258R

AVAILABLE  
with engines:

**TIER 3**

**TIER 2**

**TIER 1**

**TIER 0**



# 2WD & 4WD

## FARMER FT 7258 7258R

Efficient and robust four cylinder John Deere engine makes FT-7 series ideal solution for most tasks on livestock and crop farms, as well as for municipal and forest applications.

Model		FT-7258	FT-7258R
<b>Engine</b>	Rated power	56 kW (76 HP)	56 kW (76 HP)
	Torque [Nm @ rpm]	276 @ 1700	276 @ 1700
	Engine brand	John Deere	John Deere
	Engine type	4 cylinders, turbocharged	4 cylinders, turbocharged
	Engine displacement	4,52 dm <sup>3</sup>	4,52 dm <sup>3</sup>
	Emission standard	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug
Air filter	Dry, dust-laden indicator	Dry, dust-laden indicator	
<b>Steering system</b>		Hydrostatic power steering	Hydrostatic power steering
<b>Front drive axle</b>	Brand	CARRARO	CARRARO
	Actuation	Electro - hydraulic	Electro - hydraulic
	Type	Mechanical, synchronized	Mechanical, synchronized
<b>Transmission</b>	Gears	12x12 (option 24x24)	12x12 (option 24x24)
	Reverse	Mechanical	Mechanical
	Torque amplifier	-	-
	Brand	CARRARO	CARRARO
	Clutch	Dry, double-plate	Dry, double-plate
<b>Brakes</b>		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
<b>Hydraulic system</b>	Type	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift
	Pump oil flow	58 dm <sup>3</sup> /min	58 dm <sup>3</sup> /min
	Max. pressure in the system	180 Bar	180 Bar
	External hydraulics	Double ISO couplers	Double ISO couplers
	Lift capacity	2500 kg or 3000 kg (additional cylinder-option)	2500 kg or 3000 kg (additional cylinder-option)
<b>Power Take-off (PTO)</b>	Speed range	540/1000 rpm	540/1000 rpm
	Type	Independent and ground speed PTO	Independent and ground speed PTO
<b>Weights</b>	Complete weight	3740 kg	3125 kg
	Weight distribution (front/rear)	1784 / 1956 kg	1495 / 1630 kg
<b>Tires</b>	Front	11,2x24	7,5x16
	Rear	16,9x30	16,9x30
<b>Options</b>	Air conditioning	Yes	-
	Lower hitch/Pick-up hitch	Yes/Yes	Yes/Yes
	Front Three Point Linkage	Yes	Yes
	Rear ballast	2x50 kg or 4x50 kg	2x50 kg or 4x50 kg
	Front ballast	6x45 kg	6x45 kg
	Pneumatic seat	Yes	Yes
Fuel tank capacity	125 dm <sup>3</sup>	125 dm <sup>3</sup>	

# FARMER FT 7258 7258R

The FT-7 series tractors are equipped with Carraro transmission with four synchronized gears in three ranges offering 12 speeds forward and 12 reverse. The basic gearbox is offered in a 40 km/h configuration on the all models. A creep speed unit with 24 forward and 24 reverse gears is available as an option.




2WD  
&  
4WD

## Speeds [km/h]

12 F / 12 R

24 F / 24 R

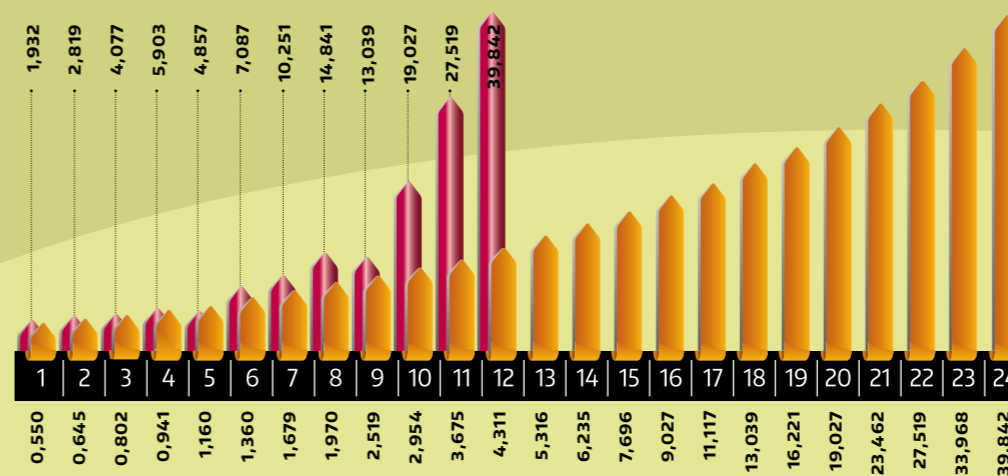

Maximum trailer weight with pneumatic brakes:



**13000 kg**



## Sizes



## Engine power and torque curves

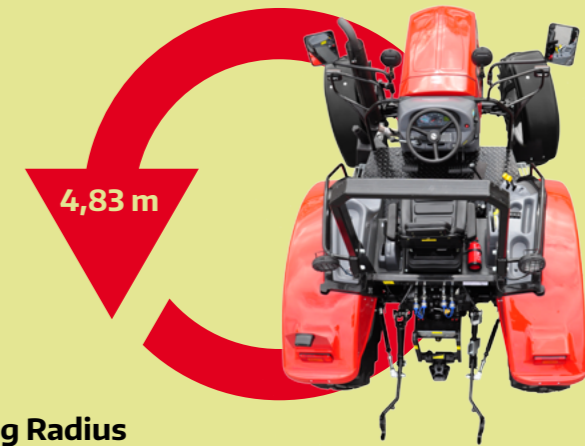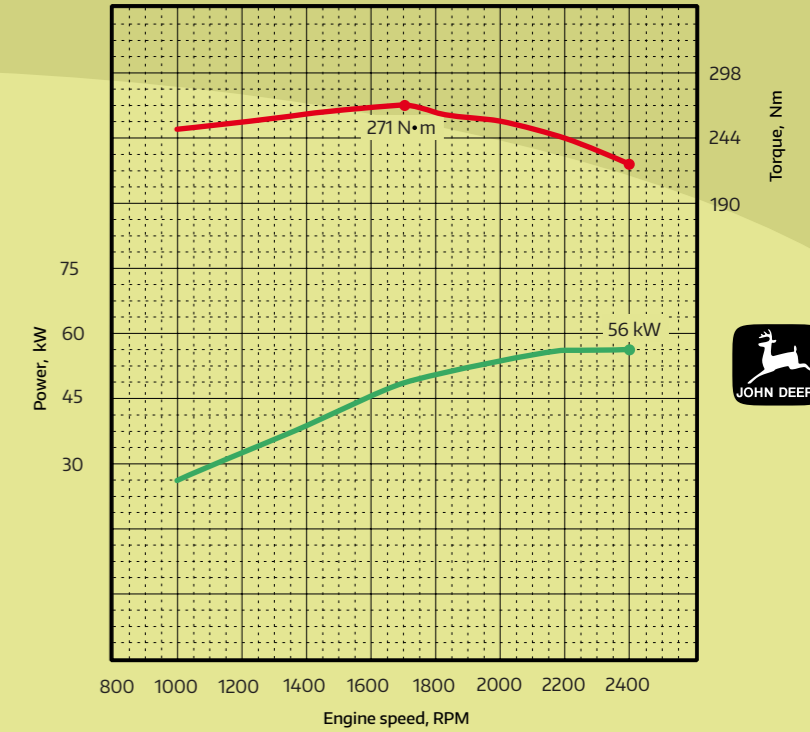

Turning Radius





**Farmer  
Traktor**

*Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.*

[www.farmer.net.pl](http://www.farmer.net.pl)