



**Farmer
Traktor**

FT

9258

9258R

9288

9288R

FT
9258
9258R

9288
9288R

AVAILABLE
with engines:

TIER 3

TIER 2

TIER 1

TIER 0



2WD
&
4WD

FARMER FT 9258 / 9258R \ 9288 / 9288R

4-cylinder engines offer high fuel efficiency low noise and a high torque backup. The basic gearbox is offered in a 40 km/h configuration with all models. A creep speed unit with 24 forward and 24 reverse gears is available as an option.

Model	FT-9258	FT-9258R	FT-9288	FT-9288R
Engine	Rated power	63 kW (86 HP)	63 kW (86 HP)	68 kW (92 HP)
	Torque [Nm @ rpm]	302 @ 1700	302 @ 1700	390 @ 1400
	Engine brand	John Deere	John Deere	Perkins
	Engine type	4 cylinders, turbocharged	4 cylinders, turbocharged	4 cylinders, turbocharged
	Engine displacement	4,52 dm ³	4,52 dm ³	4,4 dm ³
	Emission standard	TIER III A	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug	Sparking plug
Air filter	Dry, dust-laden indicator	Dry, dust-laden indicator	Two-stage dry type	Two-stage dry type
Steering system	Hydrostatic power steering		Hydrostatic power steering	Hydrostatic power steering
Front drive axle	Brand	CARRARO	CARRARO	CARRARO
	Actuation	Electro - hydraulic	Electro - hydraulic	Electro - hydraulic
Transmission	Type	Mechanical, synchronized	Mechanical, synchronized	Mechanical, synchronized
	Gears	12x12 (option 24x24)	12x12 (option 24x24)	12x12 (option 24x24)
	Reverse	Mechanical	Mechanical	Mechanical
	Torque amplifier	-	-	-
	Brand	CARRARO	CARRARO	CARRARO
Brakes	Clutch	Dry, double-plate	Dry, double-plate	Dry, double-plate
		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
Hydraulic system	Type	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift
	Pump oil flow	58 dm ³ /min	58 dm ³ /min	58 dm ³ /min
	Max. pressure in the system	180 Bar	180 Bar	180 Bar
	External hydraulics	Double ISO couplers	Double ISO couplers	Double ISO couplers
Power Take-off (PTO)	Lift capacity	2500 kg or 3000 kg (additional cylinder-option)	2500 kg or 3000 kg (additional cylinder-option)	2500 kg or 3000 kg (additional cylinder-option)
	Speed range	540/1000 rpm	540/1000 rpm	540/1000 rpm
Weights	Type	Independent and ground speed PTO	Independent and ground speed PTO	Independent and ground speed PTO
	Complete weight	3740 kg	3125 kg	3740 kg
	Weight distribution (front/rear)	1784 / 1956 kg	1495 / 1630 kg	1784 / 1956 kg
Tires	Front	11,2x24	7,5x16	11,2x24
	Rear	16,9x30	16,9x30	16,9x30
Options	Air conditioning	Yes	-	Yes
	Lower hitch/Pick-up hitch	Yes / Yes	Yes / Yes	Yes / Yes
	Front Three Point Linkage	Yes	Yes	Yes
	Rear ballast	2x50 kg or 4x50 kg	2x50 kg or 4x50 kg	2x50 kg or 4x50 kg
	Front ballast	6 x 45 kg	6 x 45 kg	6 x 45 kg
	Pneumatic seat	Yes	Yes	Yes
	Fuel tank capacity	125 dm ³	125 dm ³	125 dm ³

FARMER FT 9258 / 9258R | 9288 / 9288R


Very agile and stable to drive machine with the excellent visibility from the cab and perfect layout of the controls. The ergonomically-arranged controls make the operator's work easier and more comfortable.



2WD & 4WD


Speeds [km/h]

- 12 F / 12 R
- 24 F / 24 R

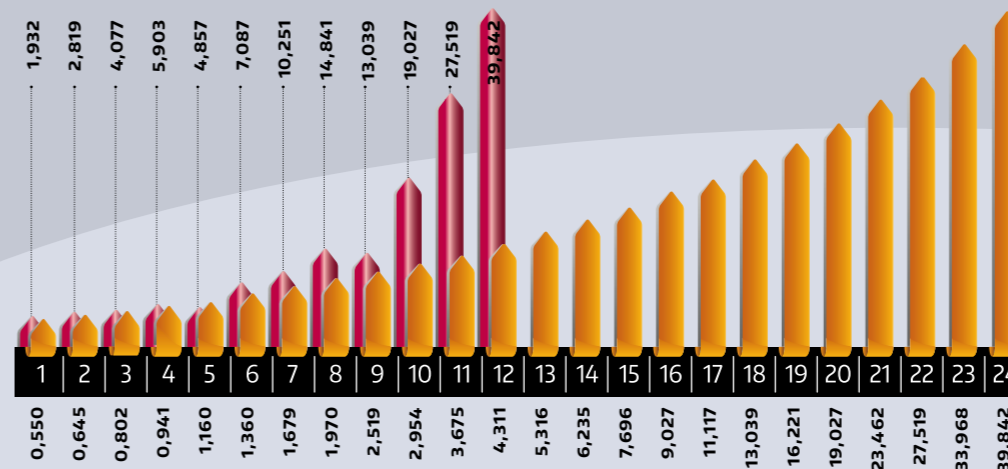


Maximum trailer weight with pneumatic brakes:


13000 kg

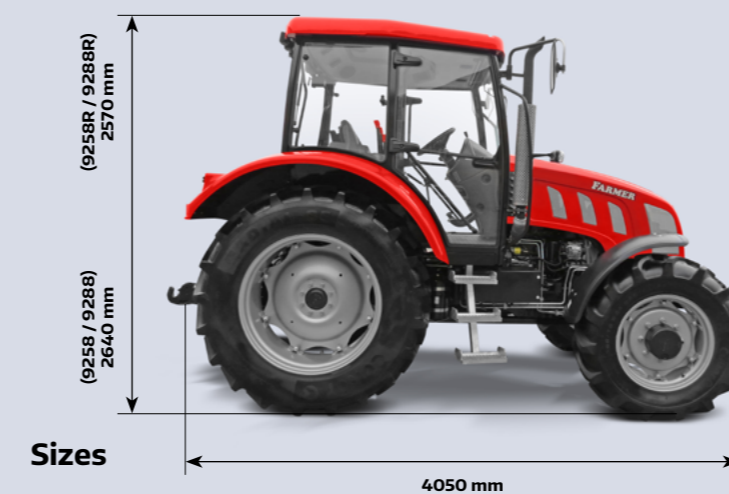

Turning Radius

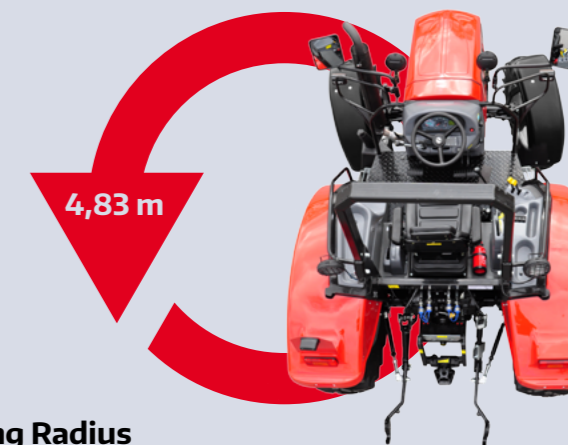

Engine power and torque curves

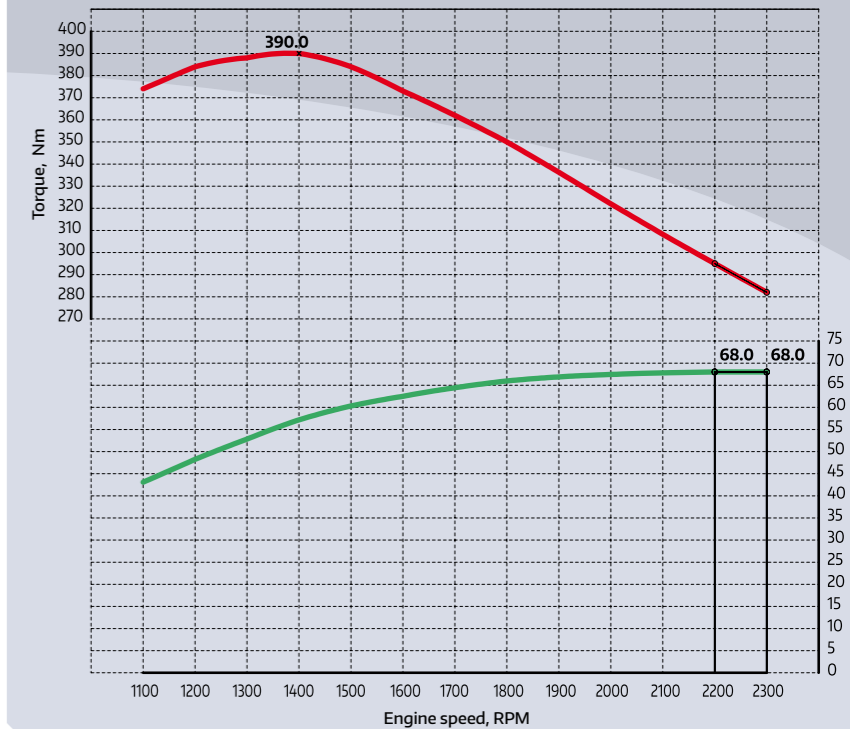



**Farmer
Traktor**

Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.

www.farmer.net.pl