



**Farmer
Traktor**

FT4
5288
5288R

FT4

5288

5288R

AVAILABLE
with engines:

TIER 3



2WD & 4WD

FARMER FT4 5288

5288R

FT4 series tractors are strong and agile. Compact size and good manoeuvrability makes them ideal solution for crop and cattle farms, as well as in forest and municipal applications.

Model		FT4-5288	FT4-5288R
Engine	Rated power	36,9 kW (50 HP)	36,9 kW (50 HP)
	Torque [Nm @ rpm]	196 @ 1400	196 @ 1400
	Engine brand	Perkins	Perkins
	Engine type	3 cylinder	3 cylinder
	Engine displacement	3,3 dm ³	3,3 dm ³
	Emission standard	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug
	Air filter	Two-stage dry type	Two-stage dry type
Steering system		Hydrostatic power steering	Hydrostatic power steering
Front drive axle	Brand	CARRARO	CARRARO
	Actuation	Mechanically	Mechanically
Transmission	Type	Mechanical, synchronized	Mechanical, synchronized
	Gears	8x8 (option 12x12)	8x8 (option 12x12)
	Reverse	Mechanical	Mechanical
	Torque amplifier	-	-
	Brand	CARRARO	CARRARO
	Clutch	Dry, double-plate	Dry, double-plate
Brakes		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
Hydraulic system	Type	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift
	Pump oil flow	47 dm ³ /min	47 dm ³ /min
	Max. pressure in the system	180 Bar	180 Bar
	External hydraulics	Double ISO couplers	Double ISO couplers
	Lift capacity	1800 kg	1800 kg
Power Take-off (PTO)	Speed range	540/540E rpm	540/540E rpm
	Type	Independent and ground speed PTO	Independent and ground speed PTO
Weights	Complete weight	2800 kg	2730 kg
	Weight distribution (front/rear)	1360/1440 kg	1270 / 1330 kg
Tires	Front	7,5x16	7,5x16
	Rear	12,4x28	12,4x28
Options	Air conditioning	Yes	-
	Lower hitch/Pick-up hitch	Yes/Yes	Yes/Yes
	Front Three Point Linkage	Yes	Yes
	Rear ballast	2x32 kg + max 6x24 kg	2x32 kg + max 6x24 kg
	Front ballast	6x45 kg	6x45 kg
	Pneumatic seat	Yes	Yes
	Fuel tank capacity	100 dm ³	100 dm ³

FARMER FT4 5288 5288R

Reliability, agility and high endurance make these tractors ideally suited for all type of work. Unbeatable in terms of operational costs.



FT4-5288R model




2WD
&
4WD

Speeds


[km/h]

12 F / 12 R


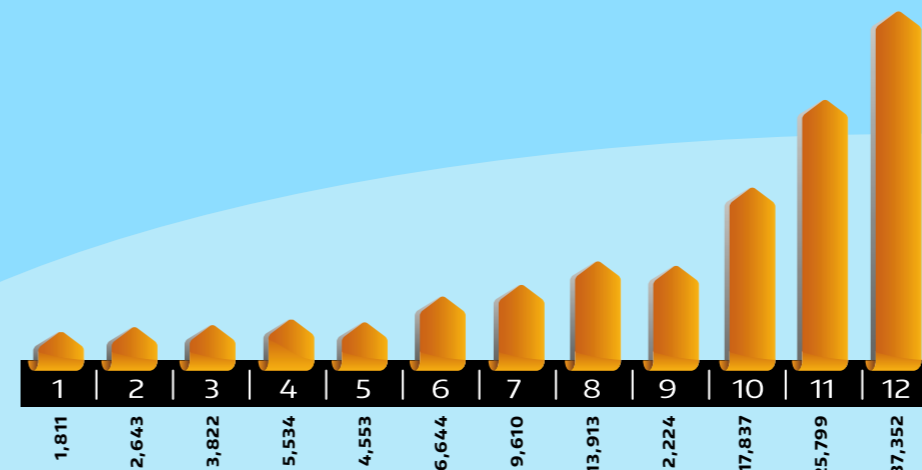


Maximum trailer weight with pneumatic brakes:

11000 kg

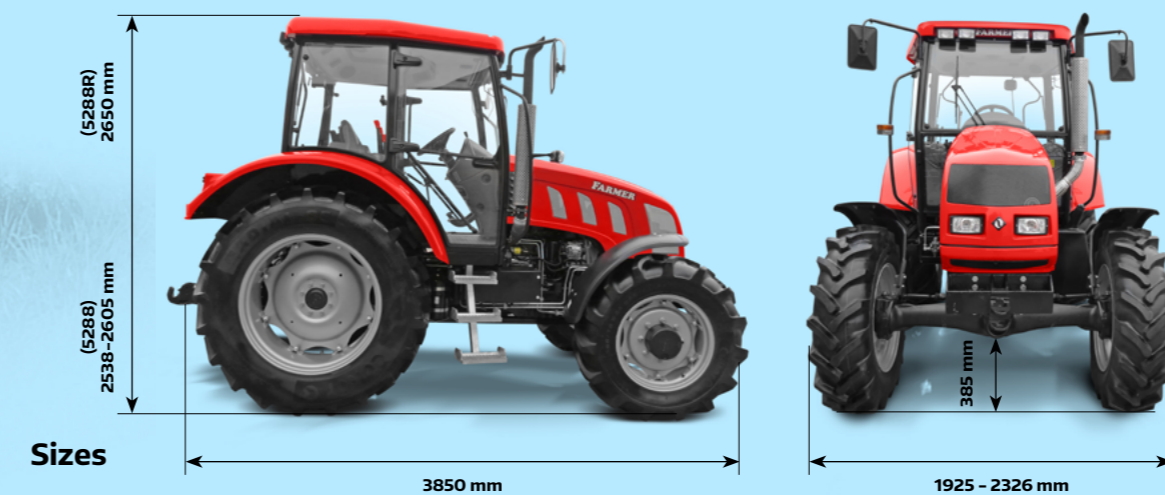

Engine power and torque curves

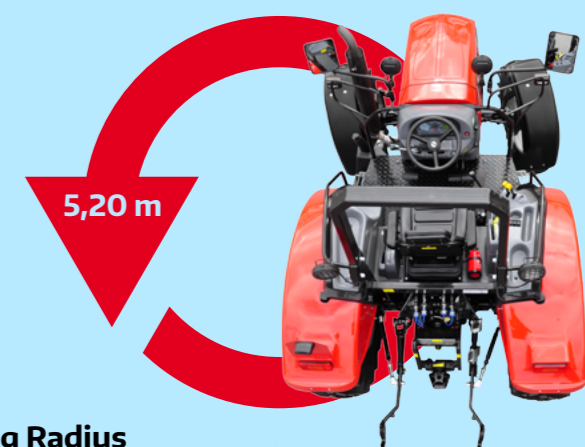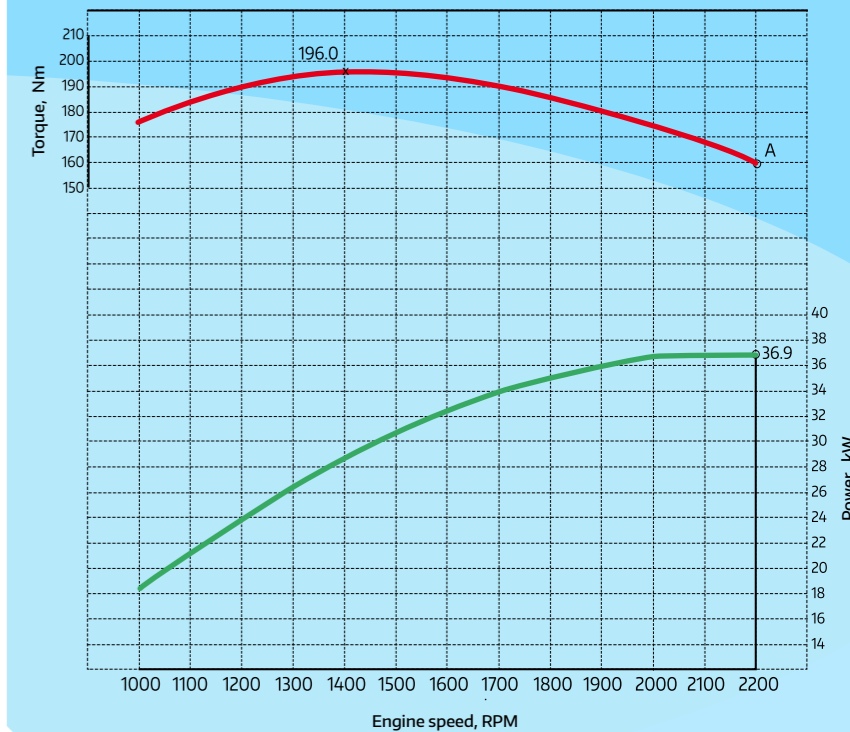

Turning Radius



**Farmer
Traktor**

Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.

www.farmer.net.pl