



**Farmer
Traktor**

FT4
6288
6288R

FT4

6288

6288R

AVAILABLE
with engines:

TIER 3

TIER 0



2WD
&
4WD

FARMER FT4

6288

6288R

FT4-6288 and FT4-6288R are powered by the quiet, fuel efficient three-cylinder Perkins engine which deliver up to 68 HP, providing exceptional torque back-up.

Model		FT4-6288	FT4-6288R
Engine	Rated power	45 kW (68 HP)	45 kW (68 HP)
	Torque [Nm @ rpm]	280 @ 1400	280 @ 1400
	Engine brand	Perkins	Perkins
	Engine type	3 cylinder	3 cylinder
	Engine displacement	3,3 dm ³	3,3 dm ³
	Emission standard	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug
Air filter	Dry, dust-laden indicator	Dry, dust-laden indicator	
Steering system		Hydrostatic power steering	Hydrostatic power steering
Front drive axle	Brand	CARRARO	CARRARO
	Actuation	Mechanically	Mechanically
	Type	Mechanical, synchronized	Mechanical, synchronized
Transmission	Gears	8x8 (option 12x12)	8x8 (option 12x12)
	Reverse	Mechanical	Mechanical
	Torque amplifier	-	-
	Brand	CARRARO	CARRARO
	Clutch	Dry, double-plate	Dry, double-plate
Brakes		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
Hydraulic system	Type	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift
	Pump oil flow	47 dm ³ /min	47 dm ³ /min
	Max. pressure in the system	180 Bar	180 Bar
	External hydraulics	Double ISO couplers	Double ISO couplers
	Lift capacity	1800 kg	1800 kg
Power Take-off (PTO)	Speed range	540/540E rpm	540/540E rpm
	Type	Independent and ground speed PTO	Independent and ground speed PTO
Weights	Complete weight	3120 kg	3050 kg
	Weight distribution (front/rear)	1515 / 1605 kg	1488 / 1562 kg
	Front	11,2x24	7,5x16
Tires	Rear	16,9x30	16,9x30
	Air conditioning	Yes	-
Options	Lower hitch/Pick-up hitch	Yes/Yes	Yes/Yes
	Front Three Point Linkage	Yes	Yes
	Rear ballast	2x32 kg + max 6x24 kg	2x32 kg + max 6x24 kg
	Front ballast	6x45 kg	6x45 kg
	Pneumatic seat	Yes	Yes
	Fuel tank capacity	100 dm ³	100 dm ³

FARMER FT4 6288 6288R

Standard transmission provides 12 forward and 12 reverse speeds with mechanical reverse shuttle. A creep speed option is available on request to achieve 24 forward and 12 reverse speeds.




2WD & 4WD

Speeds

[km/h]

12 F / 12 R

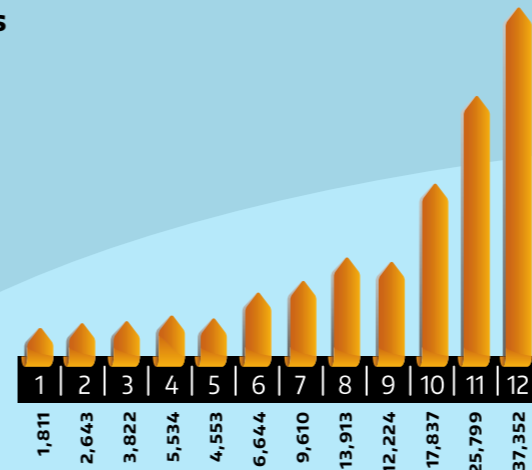


Maximum trailer weight with pneumatic brakes:

11000 kg




Sizes

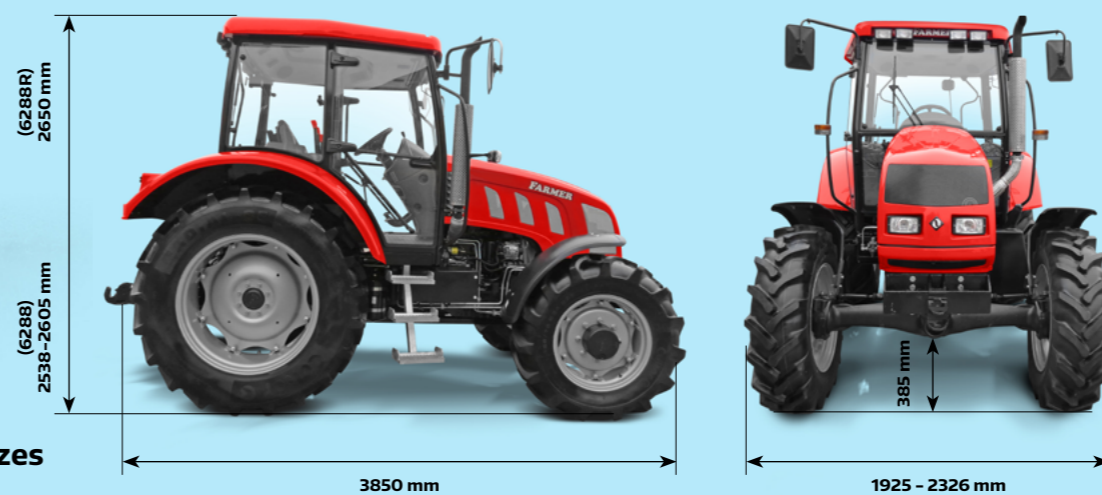

5,20 m

Turning Radius

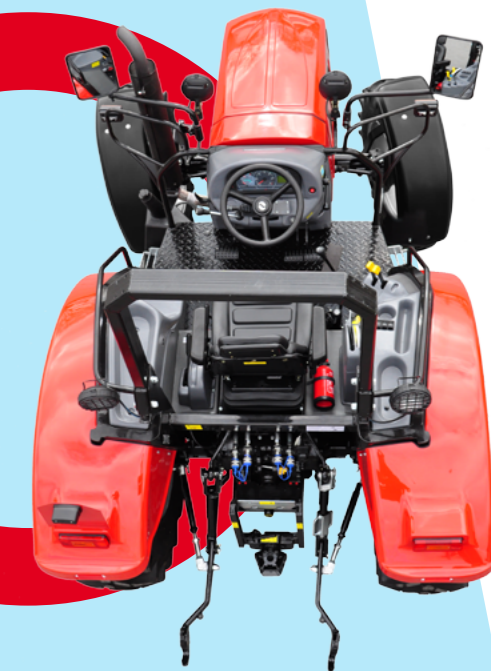



**Farmer
Traktor**

Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.

www.farmer.net.pl