



**Farmer
Traktor**

FT5

11288

11288R

FT5 11288 11288R

AVAILABLE
with engines:

TIER 3

TIER 1

TIER 0



2WD & 4WD

FARMER FT5 11288 11288R

Universal, top-performing agriculture tractor – ideal for mowing, fertilization, harvesting, sowing and many others. The tractor core structure is based on modern, reliable, fuel efficient 110 HP Perkins engine and Carraro drive train.

Model		FT5-11288	FT5-11288R
Engine	Rated power	81 kW (110 HP)	81 kW (110 HP)
	Torque [Nm @ rpm]	416 @ 1400	416 @ 1400
	Engine brand	Perkins	Perkins
	Engine type	4 cylinders, turbocharged	4 cylinders, turbocharged
	Engine displacement	4,4 dm ³	4,4 dm ³
	Emission standard	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug
	Air filter	Two-stage dry type	Two-stage dry type
Steering system		Hydrostatic power steering	Hydrostatic power steering
Front drive axle	Brand	CARRARO	CARRARO
	Actuation	Electro - hydraulic	Electro - hydraulic
	Type	Mechanical, synchronized	Mechanical, synchronized
Transmission	Gears	12x12 (option 24x24)	12x12 (option 24x24)
	Reverse	Mechanical	Mechanical
	Torque amplifier	-	-
	Brand	CARRARO	CARRARO
	Clutch	Dry, double-plate	Dry, double-plate
Brakes		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
Hydraulic system	Type	EHR	EHR
	Pump oil flow	107 dm ³ /min	107 dm ³ /min
	Max. pressure in the system	180 Bar	180 Bar
	External hydraulics	Triple ISO couplers	Triple ISO couplers
	Lift capacity	4200 kg	4200 kg
Power Take-off (PTO)	Speed range	540/1000 rpm	540/1000 rpm
	Type	Independent and ground speed PTO	Independent and ground speed PTO
Weights	Complete weight	4650 kg	4295 kg
	Weight distribution (front/rear)	1980 / 2670 kg	1828 / 2467 kg
Tires	Front	13,6x24	13,6x24
	Rear	18,4x34	18,4x34
Options	Air conditioning	Yes	-
	Lower hitch/Pick-up hitch	Yes / Yes	Yes / Yes
	Front Three Point Linkage	Yes	Yes
	Rear ballast	2x50 kg or 4x50 kg	2x50 kg or 4x50 kg
	Front ballast	10 x 45 kg	10 x 45 kg
	Pneumatic seat	Yes	Yes
	Fuel tank capacity	155 dm ³	155 dm ³

FARMER FT5 11288 11288R

The FT5-11 series tractors feature a Carraro transmission with four synchronized gears in three ranges offering 12 speeds forward and 12 reverse. The basic gearbox is offered in a 40 km/h configuration on the all models. A creep speed unit with 24 forward and 24 reverse gears is available as an option.




EHR
Easy and precise control of rear three point linkage




2WD & 4WD

Speeds [km/h]



■ 12 F / 12 R
■ 24 F / 24 R

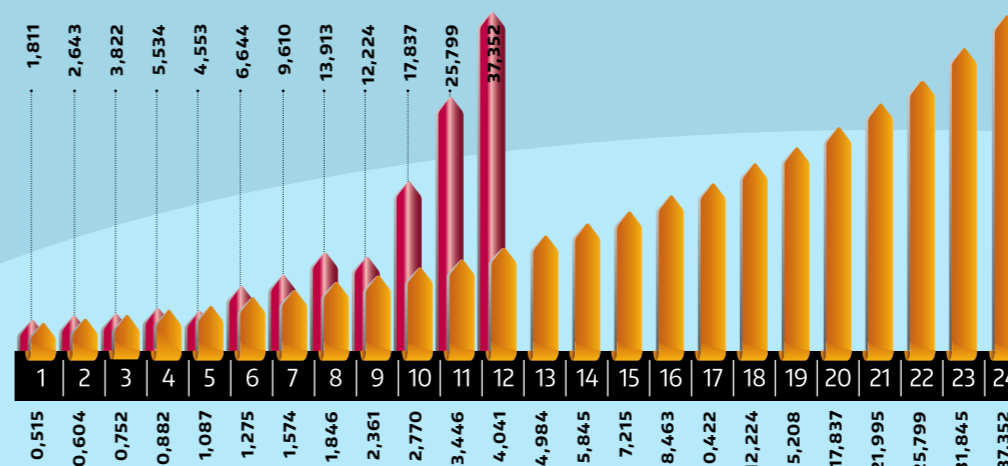

Maximum trailer weight with pneumatic brakes:
18000 kg

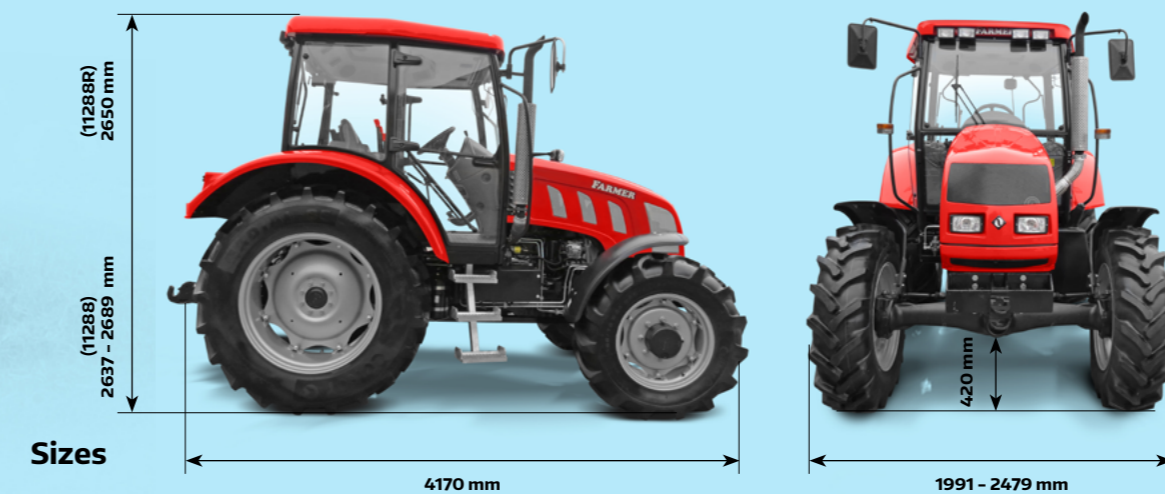

Engine power and torque curves

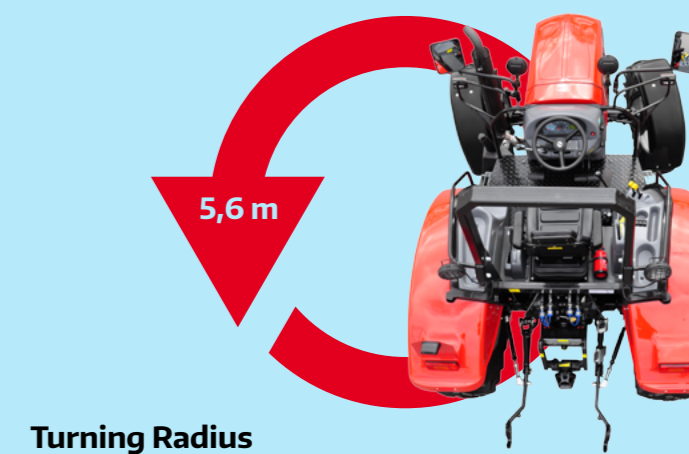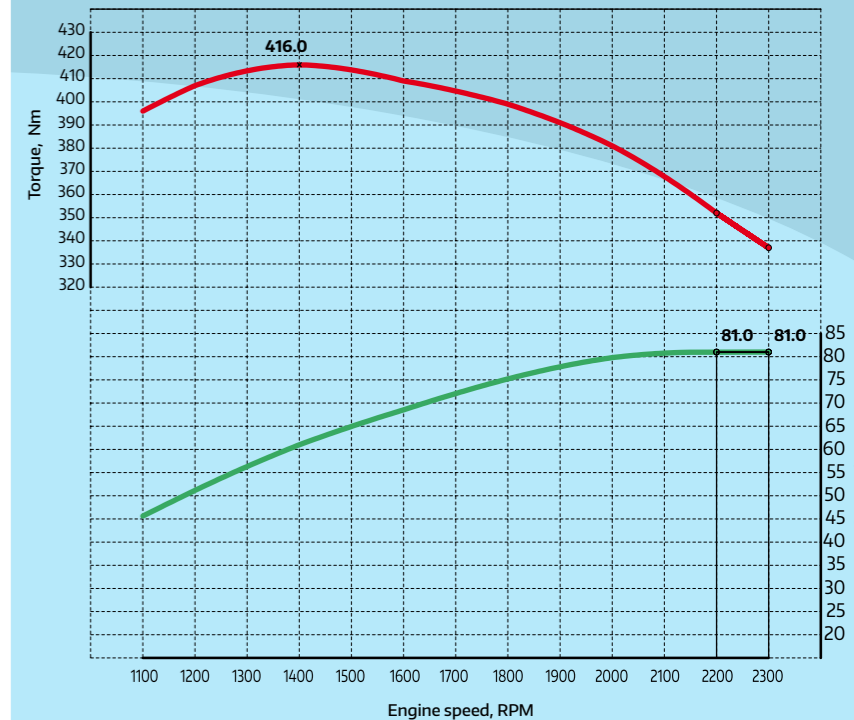



**Farmer
Traktor**

Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.

www.farmer.net.pl