



**Farmer  
Traktor**

**FT5**

**12248**

**12277**

# FT5

## 12248

## 12277

AVAILABLE  
with engines:

### TIER 3

### TIER 2



# 2WD & 4WD

## FARMER FT5 12248 12277

Farmer FT5-12, was designed especially for enduring power during toughest operations and have been coordinated for high power transmission with the lowest consumption. Simple to operate, with roomy and comfortable cabin. Low maintenance and operating costs guaranteed.

Model		FT5-12248	FT5-12277
<b>Engine</b>	Rated power	81 kW (110 HP)	82 kW (112 HP)
	Torque [Nm @ rpm]	429 @ 1600	511 @ 1250
	Engine brand	MMZ	IVECO
	Engine type	4 cylinders, turbocharged	4 cylinders, turbocharged
	Engine displacement	4,75 dm <sup>3</sup>	4,48 dm <sup>3</sup>
	Emission standard	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug
<b>Air filter</b>		Dry, dust-laden indicator	Dry, dust-laden indicator
<b>Steering system</b>		Hydrostatic power steering	Hydrostatic power steering
<b>Front drive axle</b>	Brand	CARRARO	CARRARO
	Actuation	Electro - hydraulic	Electro - hydraulic
<b>Transmission</b>	Type	Mechanical, synchronized	Mechanical, synchronized
	Gears	12x12 (option 24x24)	12x12 (option 24x24)
	Reverse	Mechanical	Mechanical
	Torque amplifier	-	-
	Brand	CARRARO	CARRARO
<b>Clutch</b>		Dry, double-plate	Dry, double-plate
<b>Brakes</b>		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
<b>Hydraulic system</b>	Type	EHR	EHR
	Pump oil flow	70 dm <sup>3</sup> /min	107 dm <sup>3</sup> /min
	Max. pressure in the system	180 Bar	180 Bar
	External hydraulics	Triple ISO couplers	Triple ISO couplers
<b>Lift capacity</b>		4500 kg	4500 kg
<b>Speed range</b>		540/1000 rpm	540/1000 rpm
	Type	Independent and ground speed PTO	Independent and ground speed PTO
<b>Weights</b>	Complete weight	4650 kg	4650 kg
	Weight distribution (front/rear)	1980 / 2670 kg	1980 / 2670 kg
<b>Tires</b>	Front	13,6x24	13,6x24
	Rear	18,4x34	18,4x34
<b>Options</b>	Air conditioning	Yes	Yes
	Lower hitch/Pick-up hitch	Yes / Yes	Yes / Yes
	Front Three Point Linkage	Yes	Yes
	Rear ballast	2x50 kg or 4x50 kg	2x80 kg or 4x80 kg
	Front ballast	10 x 45 kg	10 x 45 kg
	Pneumatic seat	Yes	Yes
	Fuel tank capacity	155 dm <sup>3</sup>	155 dm <sup>3</sup>

# FARMER FT5 12248 12277

Simple, mechanical construction that offers high comfort standards for a driver. Cabin offers plenty of space and all operating elements are clearly arranged – exactly there, where you need it.




**EHR**  
Easy and precise control of rear three point linkage



## Speeds [km/h]

■ 12 F / 12 R

■ 24 F / 24 R

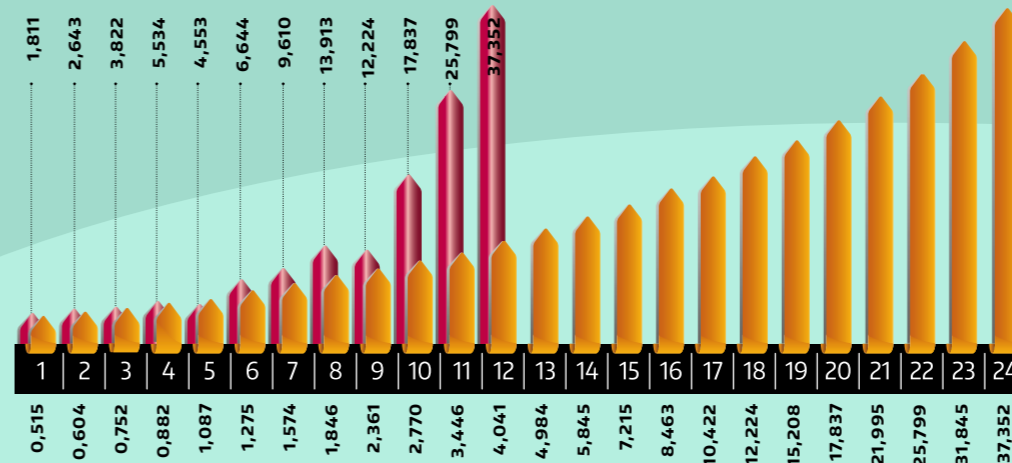


Maximum trailer weight with pneumatic brakes:


**18000 kg**



**Sizes**

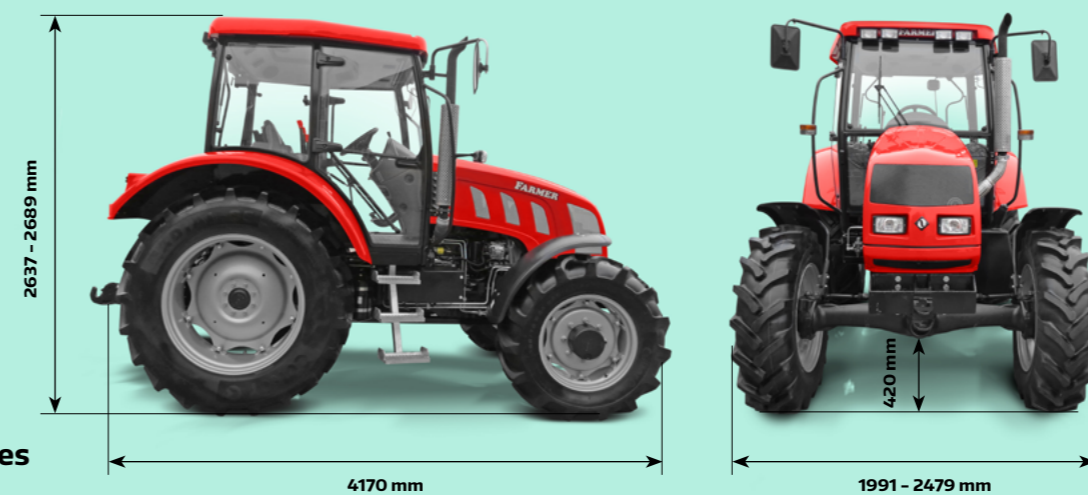

**Turning Radius**

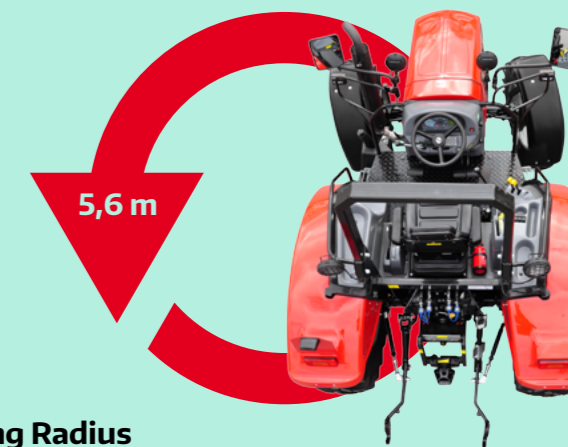



**Farmer  
Traktor**

*Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.*

[www.farmer.net.pl](http://www.farmer.net.pl)