



**Farmer
Traktor**

FT4

7288

7288R

FT4 7288 7288R

AVAILABLE
with engines:

TIER 3
TIER 0



2WD & 4WD

FARMER FT4 7288 7288R

Designed for hard work, endurance and high economy. These tractors feature uncompromising solutions. Powerful and fuel efficient Perkins engines make perfect match with mechanical transmission from Carraro.

Model		FT4-7288	FT4-7288R
Engine	Rated power	55,5 kW (75 HP)	55,5 kW (75 HP)
	Torque [Nm @ rpm]	307 @ 1400 Nm	307 @ 1400 Nm
	Engine brand	Perkins	Perkins
	Engine type	4 cylinders, turbocharged	4 cylinders, turbocharged
	Engine displacement	4,4 dm ³	4,4 dm ³
	Emission standard	TIER III A	TIER III A
	Cranking assistance	Sparking plug	Sparking plug
Air filter	Two-stage dry type	Two-stage dry type	
Steering system		Hydrostatic power steering	Hydrostatic power steering
Front drive axle	Brand	CARRARO	CARRARO
	Actuation	Mechanically	Mechanically
	Type	Mechanical, synchronized	Mechanical, synchronized
Transmission	Gears	8x8 (option 12x12)	8x8 (option 12x12)
	Reverse	Mechanical	Mechanical
	Torque amplifier	-	-
	Brand	CARRARO	CARRARO
	Clutch	Dry, double-plate	Dry, double-plate
Brakes		Hydraulic, disc, oil immersed	Hydraulic, disc, oil immersed
Hydraulic system	Type	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift	Universal with forcible regulation, mixing control, steering of lifting speed, blocking of lift
	Pump oil flow	47 dm ³ /min	47 dm ³ /min
	Max. pressure in the system	180 Bar	180 Bar
	External hydraulics	Double ISO couplers	Double ISO couplers
	Lift capacity	2000 kg	2000 kg
Power Take-off (PTO)	Speed range	540/540E rpm	540/540E rpm
	Type	Independent and ground speed PTO	Independent and ground speed PTO
Weights	Complete weight	3120 kg	3050 kg
	Weight distribution (front/rear)	1515/1605 kg	1488 / 1562 kg
	Front	11,2x24	7,5x16
Tires	Rear	16,9x30	16,9x30
	Air conditioning	Yes	-
Options	Lower hitch/Pick-up hitch	Yes/Yes	Yes/Yes
	Front Three Point Linkage	Yes	Yes
	Rear ballast	2x32 kg + max 6x24 kg	2x32 kg + max 6x24 kg
	Front ballast	6x45 kg	6x45 kg
	Pneumatic seat	Yes	Yes
	Fuel tank capacity	100 dm ³	100 dm ³

FARMER FT4 7288 7288R

Compact, all wheel drive tractor series that makes perfect match with our dedicated front loaders with maximum lift capacity of 1600kg. Apart from 8F/8R robust mechanical transmission (with mechanical shuttle) tractors feature strenghtened axle drive.




2WD & 4WD

Speeds


[km/h]

12 F / 12 R


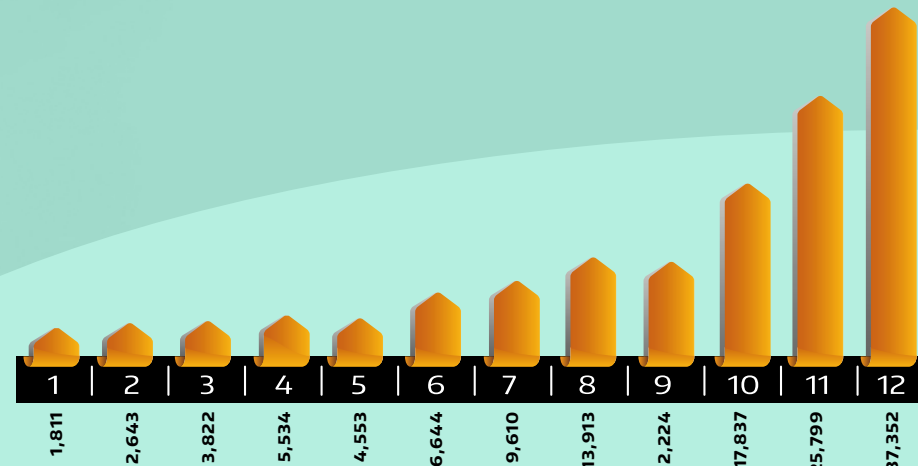


Maximum trailer weight with pneumatic brakes:

11000 kg

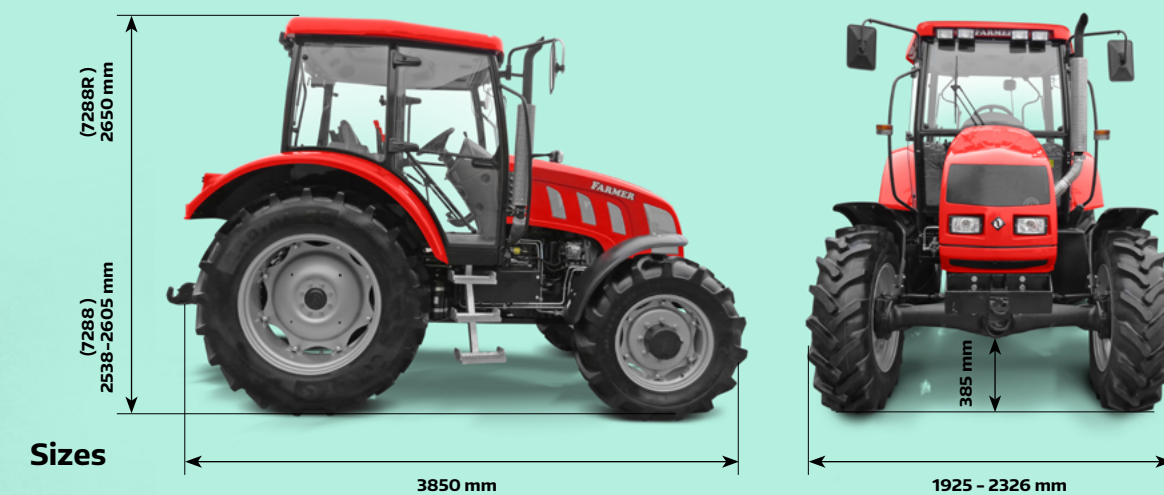

Engine power and torque curves

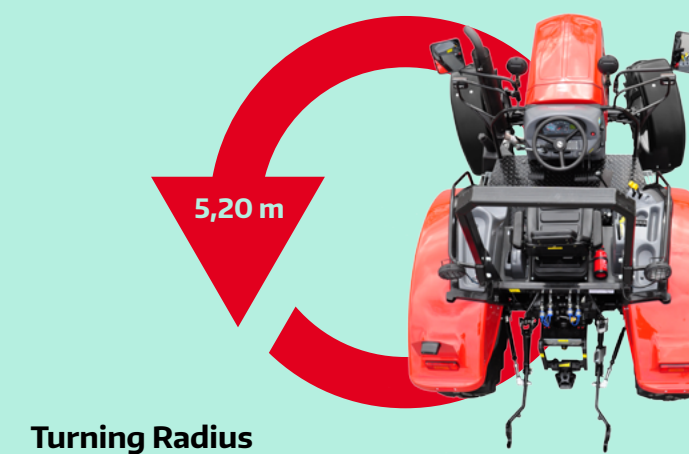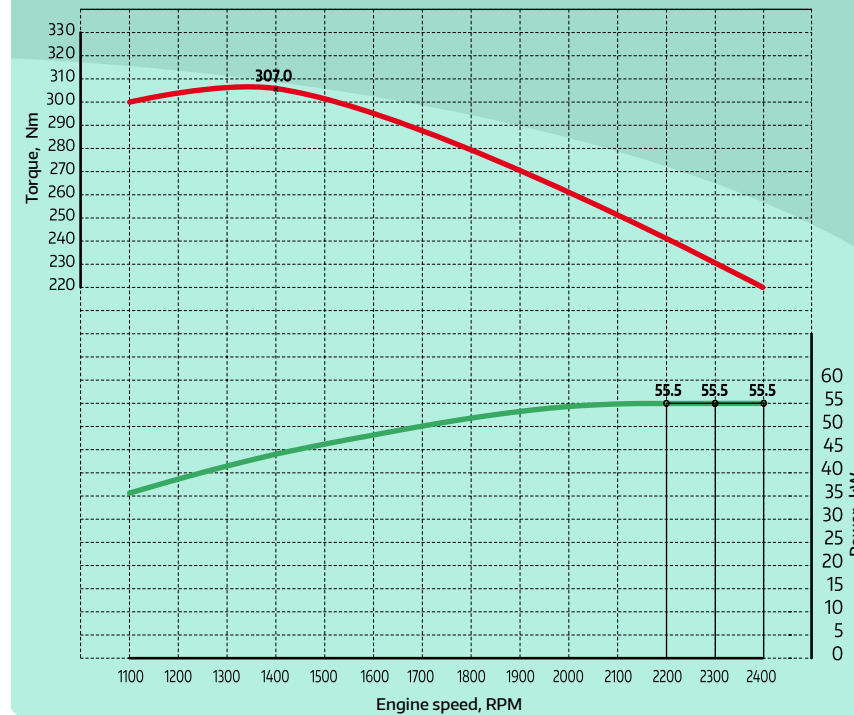



**Farmer
Traktor**

Farmer Traktor Sp. z o.o. has made every effort to provide accurate information in this brochure, however we reserve the right to change and/or adjust and/or amend specifications, equipment and availability without prior notice. This leaflet cannot be regarded as final, and as such does not constitute an offer for sale of any particular tractor, equipment or so on of specification.

www.farmer.net.pl